r											AIA #
						roject Name: _				AIA #	
	Ľ	EQUIPM				L	ocation:				
2001 East Terra Lane • O'Fallon, Missouri 63366 (636)240-2400 • Fax (636)272-2408 • (800)325-6152 • Intl Fax# (001)636-272-7546										SIS #	
1 (0 - 0 - 2 + 0 - 2 + 0 - 2 + 0 - 2 - 2 + 0 - 2 - 2 + 0 - 2 - 2 - 2 - 2 - 2 - 2 - 2 - 2 - 2 -						1odel #:					
Model:	Glas	s Door	Mer	chan	diser						
GDM-23RF-LD	Swing	g Door R	adius	Front	Refrige	erato	or with LED Lig	ghting			
									GDM	-23RF-	LD
		-ta	ue /							#1 manufac nerchandise	
								ref	rigeratior	actory balar n system ho 1 to 3.3°C).	
								lar		on-peel or cl inyl; durable	
								ар	proved, w erior line	ractive, NSF /hite alumir r with stainl	um
		The first for the contract of								door. Positi closure sys	
								ins wi fra	ulated glath mitered	uble pane th ass door ass d plastic cha latest in ene hnology.	embly annel
								foa A ł ins de zei	amed-in-p nigh dens ulation th pletion p	et structure blace using l ity, polyure nat has zero otential (OD warming po	Ecomate. thane ozone PP) and
				2				Botto	om moui	nted units	feature
										ower shelf t roduct visib	
			tie.						•	top of cabin	
							Scan code	Ea:	-	sible conde	
							for video				
ROUGH-IN DAT	A			Chart dim	ensions r	under	d up to the nearest ½"	Specificat	ions subjec	t to change w	vithout notice
				et Dime (inches) (mm)	nsions					Cord Length	Crated Weight
Model	Doors	Shelves	L**	D†	Н	HP	Voltage	Amps	NEMA Config.	(total ft.) (total m)	(lbs.) (kg)
GDM-23RF-LD	1	4	27	31¼	785⁄8	1⁄3	115/60/1	7.2	5-15P	9	305

** Length does not include ½" (4 mm) for door handle. † Depth does not include ½" (13 mm) for door handle.

686

794

APPROVALS: AVAILABLE AT: MADE IN U.S.A. SINCE 1945 rπ 1/14 Printed in U.S.A.

1998

1⁄3

230-240/50/1

3.0

2.74

▲ Plug type varies by country.

139

Model:

GDM-23RF-LD

Glass Door Merchandiser: Swing Door Radius Front Refrigerator with LED Lighting



STANDARD FEATURES

DESIGN

 True's commitment to using the highest quality materials and oversized refrigeration systems provides the user with colder product temperatures, and lower utility costs in an attractive merchandiser that brilliantly displays packaged food and beverages.

REFRIGERATION SYSTEM

- Factory engineered, self-contained, capillary tube system using environmentally friendly (CFC free) 134A refrigerant.
- Extra large evaporator coil balanced with higher horsepower compressor and large condenser; maintains cabinet temperatures of 33°F to 38°F (.5°C to 3.3°C).
- Sealed, cast iron, self-lubricating evaporator fan motor(s) and larger fan blades give True merchandisers a more efficient low velocity, high volume airflow design. This unique design ensures faster temperature pull down of warm product, colder holding temperatures and faster recovery in high use situations.
- Bottom mounted condensing unit positioned for easy maintenance. "No stoop" lower shelf maximizes visibility by raising merchandised product to higher level.

CABINET CONSTRUCTION

- Exterior non-peel or chip white laminated vinyl; durable and permanent.
- Interior attractive, NSF approved, white aluminum liner with stainless steel floor.
- Insulation entire cabinet structure is foamedin-place using Ecomate. A high density, polyurethane insulation that has zero ozone depletion potential (ODP) and zero global warming potential (GWP).

PLAN VIEW

• Welded, heavy duty steel frame rail, black powder coated for corrosion protection.

- Frame rail fitted with leg levelers.
- Illuminated exterior sign panel. Variety of sign options available.

DOOR

- "Low-E", double pane thermal insulated glass door assembly with mitered plastic channel frame. The latest in energy efficient technology.
- frame. The latest in energy efficient technology
 Door fitted with 12" (305 mm) long extruded
- handle.
 Self closing door. Positive seal, torsion type closure system.
- Magnetic door gasket of one piece construction, removable without tools for ease of cleaning.

SHELVING

- Four (4) adjustable, heavy duty PVC coated wire shelves 22 % "L x 23 ¼ "D (574 mm x 591 mm).
 Four (4) chrome plated shelf clips included per shelf.
- Shelf support pilasters made of same material as cabinet interior; shelves are adjustable on ½" (13 mm) increments.

LIGHTING

• LED interior lighting provides more even lighting throughout the cabinet. Safety shielded.

MODEL FEATURES

- Evaporator is epoxy coated to eliminate the potential of corrosion.
- See our website www.truemfg.com for latest color and sign offerings.
- Convenient clean-out drain built in cabinet floor.
 Listed under NSF-7 for the storage and/or display of packaged or bottled product.

ELECTRICAL

 Unit completely pre-wired at factory and ready for final connection to a 115/60/1 phase, 15 amp dedicated outlet. Cord and plug set included.




OPTIONAL FEATURES/ACCESSORIES

Upcharge and lead times may apply.

- 230 240V / 50 Hz.
- Black exterior.
- Black aluminum interior liner with black shelving.
- □ 6" (153 mm) standard legs.
- □ 6" (153 mm) seismic/flanged legs.
- □ 2½" (64 mm) diameter castors.
- □ 3" (77 mm) diameter castors.
- □ 4" (102 mm) diameter castors.
- Red wine thermostat.
- □ White wine thermostat.
- Chocolate thermostat.
- Barrel lock (factory installed).
- Wine racks.
- □ Sliding wine racks.
- Additional shelves.
- □ TrueFlex gravity feed organizers.
- Pricing strips.
- Remote cabinets (condensing unit supplied by others; system comes standard with 404A expansion valve and requires R404A refrigerant). Consult factory technical service department for BTU information. All remote units must be hard wired during installation.

Back

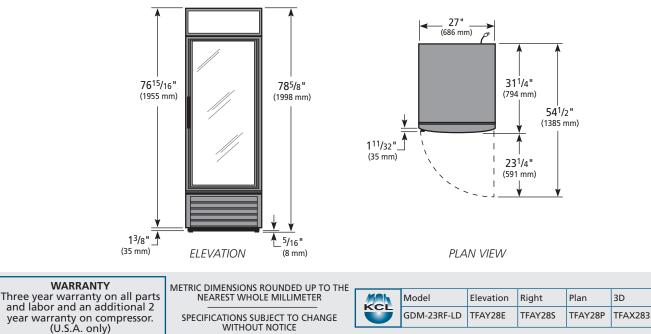

TRUE FOOD SERVICE EQUIPMENT

2001 East Terra Lane • O'Fallon, Missouri 63366 • (636)240-2400 • Fax (636)272-2408 • (800)325-6152 • Intl. Fax# (001)636-272-7546 • www.truemfg.com