

OD Series, Remote & Self-Contained Open Dairy Merchandisers



model shown OD 6 5/8



model shown OD-6 remote



Marc Refrigeration

7453 Northwest 32nd Avenue, Miami, Florida 33147 • (305) 691-0500

Fax (305) 691-1212

OD Series, Remote & Self-Contained Open Dairy Merchandisers

“While Everyone Else Says There Optional ...

... only Marc offers these kind of features **STANDARD!**



- Decorator colored sides of your choice from Marc's enormous inventory.
- Night Shades lock in your refrigeration overnight.
- Four levels of mirror stainless steel shelving *on Remote models*
THREE LEVELS OF MIRROR STAINLESS STEEL SHELVING ON SELF-CONTAINED models
- Freon 22 valve installed on remote and self-contained models.
- Dial thermometer for accurate temperature readings.
- Enhanced product lighting from top canopy and under two levels of mirror stainless steel shelving.
- ~~Optional 5 levels of product lighting.~~
- Drain is 1" pipe thread — for easy cleaning (drain connection required in field, remote and self-contained models).
- Front bumper — made of high density PVC for shopping cart impact.
- Side panels have 1/4" plexiglass for maximum visibility and safety.
- Insulation is full density, solid core urethane.
- Automatic time clocks are standard for self-contained ~~and remote~~ models.
- Mirror finish stainless steel trim, caps, moulding, main deck and shelves.

NOTE: Designed for use in locations with air conditioning, where temperature and relative humidity DO NOT exceed 75°F and 55% R.H. (Excessive condensation & loss of temperature may occur).

We reserve the right to change specifications without notice.

MODEL	LENGTH	HEIGHT	DEPTH	UNIT INSTALLED	UNIT RECOMMENDED (not included)	MINIMUM CIRCUIT AMPACITY ELECTRICAL DATA	APPROX. SHIPPING WEIGHT
OD-6R	72 1/2"	79 1/2"	34 1/2"	X	1 1/2 H.P.*	115/1/60 8 amps	700 lbs
OD-8R	94 1/2"	79 1/2"	34 1/2"	X	2 H.P.*	115/1/60 12.5 amps	800 lbs
OD-10R	116 1/2"	79 1/2"	34 1/2"	X	3 H.P.*	115/1/60 12.5 amps	1000 lbs
OD-12R	138 1/2"	79 1/2"	34 1/2"	X	3 H.P.*	115/1/60 14.5 amps	1140 lbs
OD-4S/C	49"	79 1/2"	34 1/2" plus 3" removable wall spacer for compressor air flow	1 H.P.	X	115/1/60 8 amps lights & fans	675 lbs
						230/208-60-1 9.5 amps unit & clock	
OD-6S/C	72 1/2"	79 1/2"	34 1/2" plus 3" removable wall spacer for compressor air flow	1 1/2 H.P.	X	115/1/60 8 amps lights & fans	775 lbs
						230/208-60-1 15.5 amps unit & clock	

*This size condenser unit is **RECOMMENDED** for this model. Consult a competent refrigeration mechanic to determine the appropriate size for your specific application. The appropriate condenser will vary depending on length of run, indoor/outdoor use, etc. Do not install near heat, A/C Air ducts, A/C thermostats or doorways.

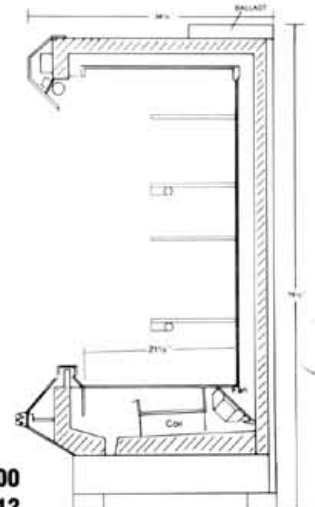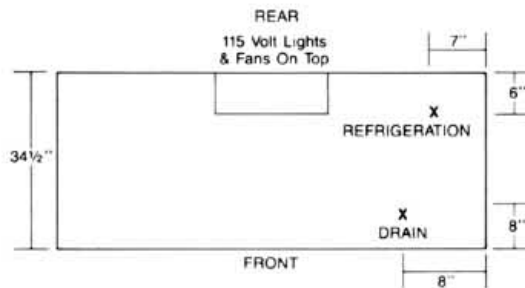

7453 Northwest 32nd Avenue, Miami, Florida 33147 • (305) 691-0500
Fax (305) 691-1212