

Kelvinator



ULG 30 BS



ULG 50 BC



ULG 80 BC

BOTTOM MOUNT VERTICAL MERCHANDISERS

Low Temperature Glass Door Cabinets

Reach-in merchandisers are designed to enhance your product sales through improved merchandising. All models offer increased viewing area, excellent product illumination and adjustable cantilever shelves.

Merchandisers are available in one, two, and three-door models to fit most common applications. In addition, models can be set side-by-side for a continuous merchandising look.

All models offer energy efficient compressor design, snap-out covers on the anti-condensate heaters and improved air flow. Patented door design eliminates the need for heaters in the door frame.



Features:

- Temperature Control Options
Mechanical Control (Standard)
- Three Stage Evaporator
- Removable Grill for cleaning and/or servicing refrigeration system
- Larger Glass Viewing Area than the Competition
- Snap-out covers on the Anti-Condensate heaters

Optional Accessories:

- Casters



KELVINATOR • UNIVERSAL NOLIN • KELVINATOR SCIENTIFIC

563 Corbin Road
Honea Path, SC 29654
800-486-8369
Fax: 864-369-1668
www.kelvinator.us

Project: _____

Item#: _____

Approval: _____

Quantity: _____

Model Specified: _____

BOTTOM MOUNT LOW TEMPERATURE VERTICAL MERCHANDISERS


TECHNICAL DATA

MODEL	ULG 30 BS	ULG 50 BC	ULG 80 BC
Temp Range	0°F to -20°F	0°F to -20°F	0°F to -20°F
Exterior Dimensions			
Length	31"	52"	78"
Depth	36 7/8"	36 7/8"	36 7/8"
Height	79 3/4"	79 3/4"	79 3/4"
Interior Dimensions			
Length	26 1/4"	47 1/4"	73 1/4"
Depth	29 5/8"	29 5/8"	29 5/8"
Height	60 5/8"	60 5/8"	60 5/8"
Capacity	27.3 cu.ft.	49.1 cu.ft.	76.2 cu.ft.
Unit HP	3/4	1	1 1/2
Shipping Weight	516 lbs	780 lbs	1038 lbs
Electrical	115V	115V/208-230	115V/208-230
Fuse Size	20	30	30
Rated Amps	14.6	13.0	16.0

NOTE: Contact Factory for Remote Specifications

Electrical Connections

ULG30



NEMA
5-20P

ULG50 & ULG80




NEMA L14-20P

Item: ULG _____

Furnish () quantity, Bottom Mount Low Temperature Merchandiser, Kelvinator Model ULG _____. The unit shall consist of white powder coat finished galvanized steel interior and exterior foamed in place. The unit will be supplied with four cantilever shelves and a bottom rack per door opening.

Cabinets are specified to use R-404a refrigerant. Refrigeration control shall be electronic control with a temperature range of 0°F to -20°F. Cabinet to have independent on/off switch for compressor and lights.

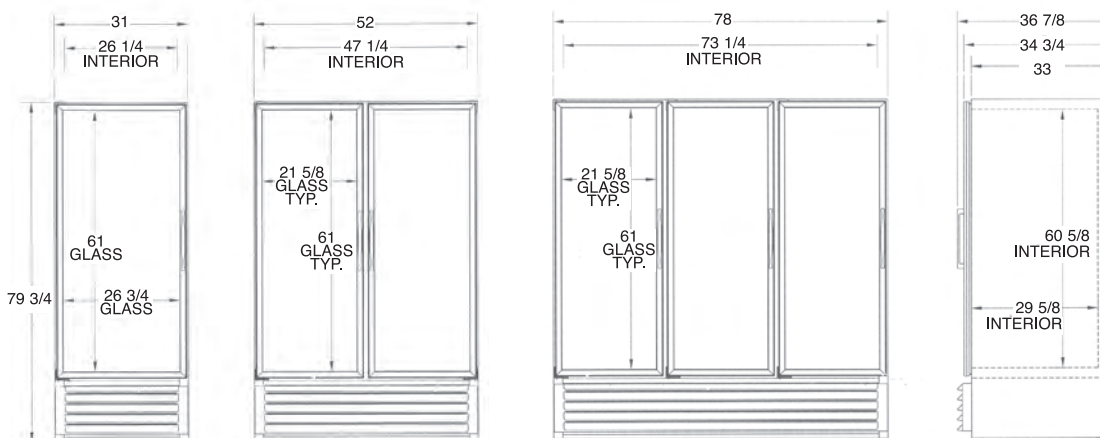

National Refrigeration reserves the right to change specifications, terms, and prices without notice.



KEVLINATOR • UNIVERSAL NOLIN • KELVINATOR SCIENTIFIC
563 Corbin Road • Honea Path, SC 29654
800-486-8369 • Fax 864-369-1668 • www.kelvinator.us