

Conserver® XL HH

Project _____
Item _____
Quantity _____
CSI Section 11400
Approval _____
Date _____

Conserver® XL HH

Models

Conserver® XL HH



Standard Features

- Electronic timer
- Internal sump design
- Built-in waste accumulator
- Delimer switch for easy removal of hard water deposits
- Removable scrap screen
- Air gap instead of vacuum breaker
- Door switch
- Convenient top mounted controls
- Auto start
- Interchangeable upper and lower stainless steel wash/rinse arms
- Wash thermometer
- Low chemical indicator lights
- Stainless steel adjustable bullet feet

Mandatory Specs

Specify voltage _____

Options

- ☐ Water Hammer Arrestor
- ☐ Scaltrol
- ☐ False Panel
- ☐ Flanged Feet
- ☐ Audible Low Product Alarm

Accessories

- ☐ 36-Compartment Rack
 - ☐ 4-1/8" tall (105 mm)
 - ☐ 5-5/8" tall (143 mm)
 - ☐ 7" tall (178 mm)
- ☐ Combination Rack
- ☐ Peg Rack

Specifications

Uses 1.53 gallons (5.8 liters) water per rack

39 racks per hour (Normal cycle)

Single point electrical connection

Self-draining stainless steel pump eliminates soil/detergent carryover between wash and rinse cycles

Fill and Dump design disposes of dirty water, replacing it with a fresh water rinse every cycle

Field convertible from straight to corner and corner to straight for flexible installations and applications

27" (685.8 mm) vertical inside clearance

Built-in chemical pumps and priming switches

Large removable scrap screen


Durable stainless steel construction



Intertek



Intertek

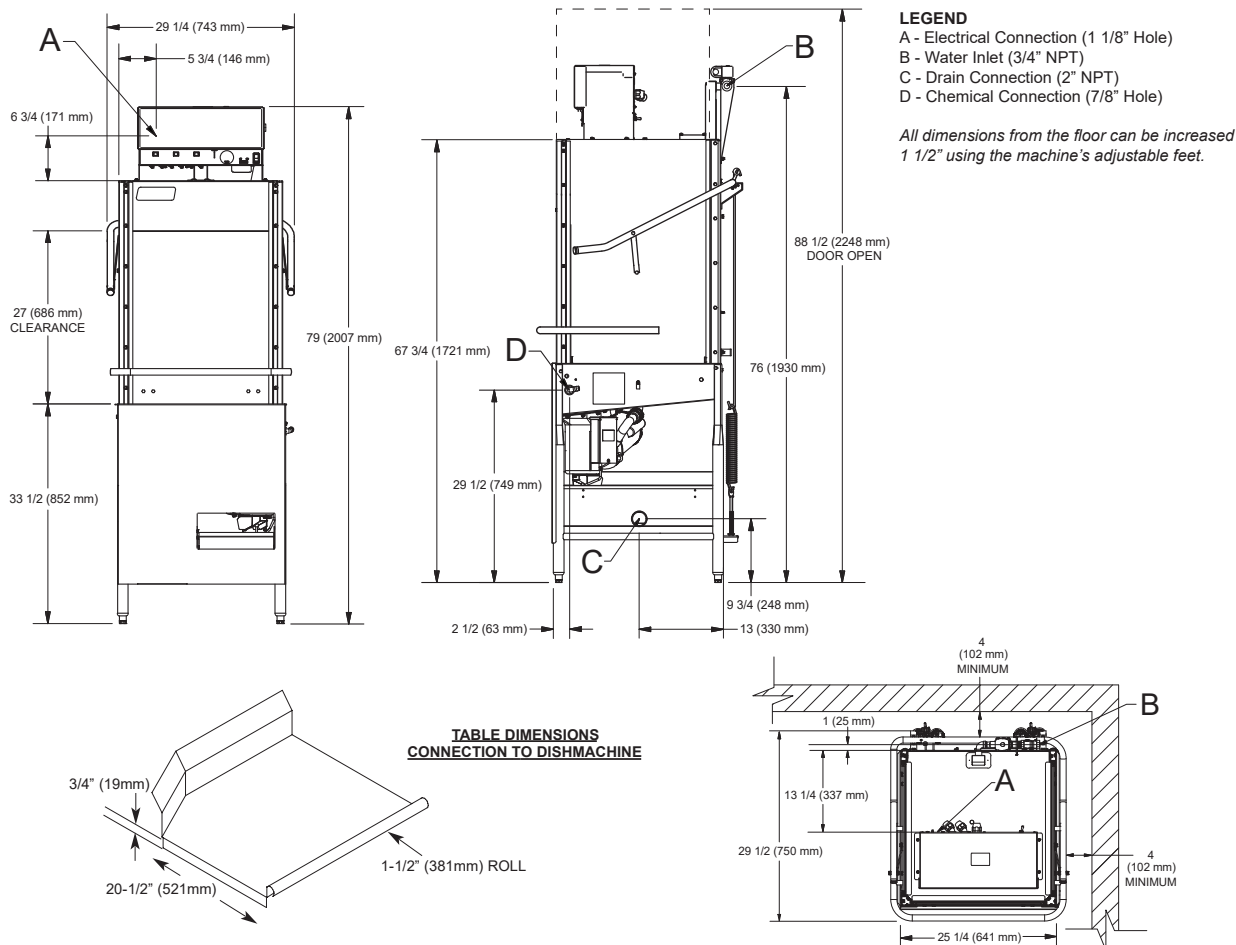

MODEL NO.	MACHINE DIMENSIONS				DRAIN HEIGHT	SHIPPING INFORMATION					
	HEIGHT	WIDTH	WIDTH BETWEEN DISHTABLES	DEPTH		WEIGHT	CLASS	CUBE	HEIGHT	WIDTH	DEPTH
Conservor® XL HH	79" (2007 mm)	29-1/4" (743 mm)	25-1/4" (641 mm)	29-1/2" (750mm)	9-3/4" (248 mm)	276 lbs (126 kg)	200	67.17 cu. ft.	83.75" (2128 mm)	33" (838 mm)	42" (1067 mm)

DIMENSIONS	
Wall Clearance (minimum)	4" (102 mm)
Standard Table Height	34" (864 mm)
Inside Clearance	27" (686 mm)
Machine Height with Door Open	88-1/2" (2248 mm)

OPERATING CAPACITY	
Racks per Hour	39
Dishes per Hour	975
Glasses per Hour	1,404

OPERATING CYCLE (seconds)	Wash	Rinse	Dwell	Total Cycle
	43	25	18	86

OPERATING TEMPERATURES	
Wash	120 °F min. (49 °C); 140 °F (60 °C) recommended
Rinse	120 °F min. (49 °C); 140 °F (60 °C) recommended

WATER	
Inlet Temperature	120 °F min. (49 °C); 140 °F (60 °C) recommended
Gallons per Hour	62.8 gal (237.8 L)
Gallons per Rack	1.53 gal (5.8 L)
Waterline Size IPS (minimum)	3/4"
Drainline Size IPS (minimum)	2"
Flow Pressure (PSI)	20 ± 5
Wash Tank Capacity	1.53 gal (5.8 L)
Minimum Chlorine Required (PPM)	50

ELECTRICAL	
Power Supply	Total Amp Load
115/60/1	10.0 A
208/60/1	5.0 A

WASH PUMP MOTOR	
Wash Pump	1 HP

HOW TO SPECIFY: Conservor® XL HH

Jackson WWS, Inc.

Shipping Address: 6209 North U.S. Highway 25E, Gray, KY 40734

Mailing Address: P.O.Box 1060, Barbourville, KY 40906

Telephone: 888-800-5672 • Fax: 606-523-1799

Email: info@jacksonwws.com

07610-004-27-61 [05/13/2020]

www.jacksonwws.com