




# Refrigeration "X"



## REFRIGERATORS AND FREEZERS BOTTOM MOUNT

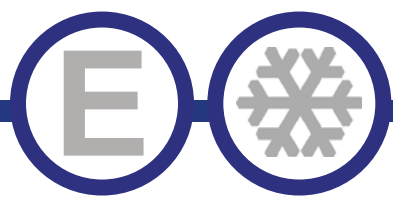

Model	Doors
ERB1X	1
ERB2X	2
ERB3X	3
EFB1X	1
EFB2X	2
EFB3X	3

### STANDARD FEATURES

- Stainless steel exterior & interior floor, interior and back aluminum. Option of bright white aluminum interior available.
- Stainless Interior available - add suffix "-SI" to the model number. i.e. ERB1X-SI
- Refrigeration system keeps food at safe temperatures between 33°F and 41°F (0.5°C to 5°C), and freezers -10°F and 0°F (-23°C --18°C).
- Self-Closing doors with 90 degree stay-open feature. Locks and keys included.
- Shelves: Adjustable heavy-duty PVC coated shelves.
- Electronic control system makes it easy to adjust temperature set point and defrost frequency.
- Preinstalled 4" swivel casters with brakes.
- Removable rear cover makes it easy to access condenser coil for cleaning and service.
- Uses R290 refrigerant, which is eco-friendly and more efficient.
- Incandescent interior lighting, safety shielded.
- Warranty: Two year parts & labor warranty, and additional 3 years on compressor.

\*Not suitable for installation in a non-commercial or residential applications.

Items	Description	Items	Description
Front, top & sides	Stainless steel	Temperature control	Solid state thermostat/Digital display
Doors	Stainless steel / Aluminum liner	Approvals	ETL Listed
External back	Aluminum	Refrigerating system	Capillary tube
Cabinet interior	Aluminum	Refrigerant	R290
Interior floor	Stainless Steel	Temperature range	(R) 33-41F; (F) -10° to 0°F
Insulation	Polyurethane (CFC free)	Evaporator	Powder coated aluminum/copper
Shelves	Heavy duty, PVC coating	Condensing unit	Bottom mounted


CONFORMS TO NSF/ANSI STD 7



REFRIGERATION BOTTOM MOUNT



# DETAILS AND DIMENSIONS

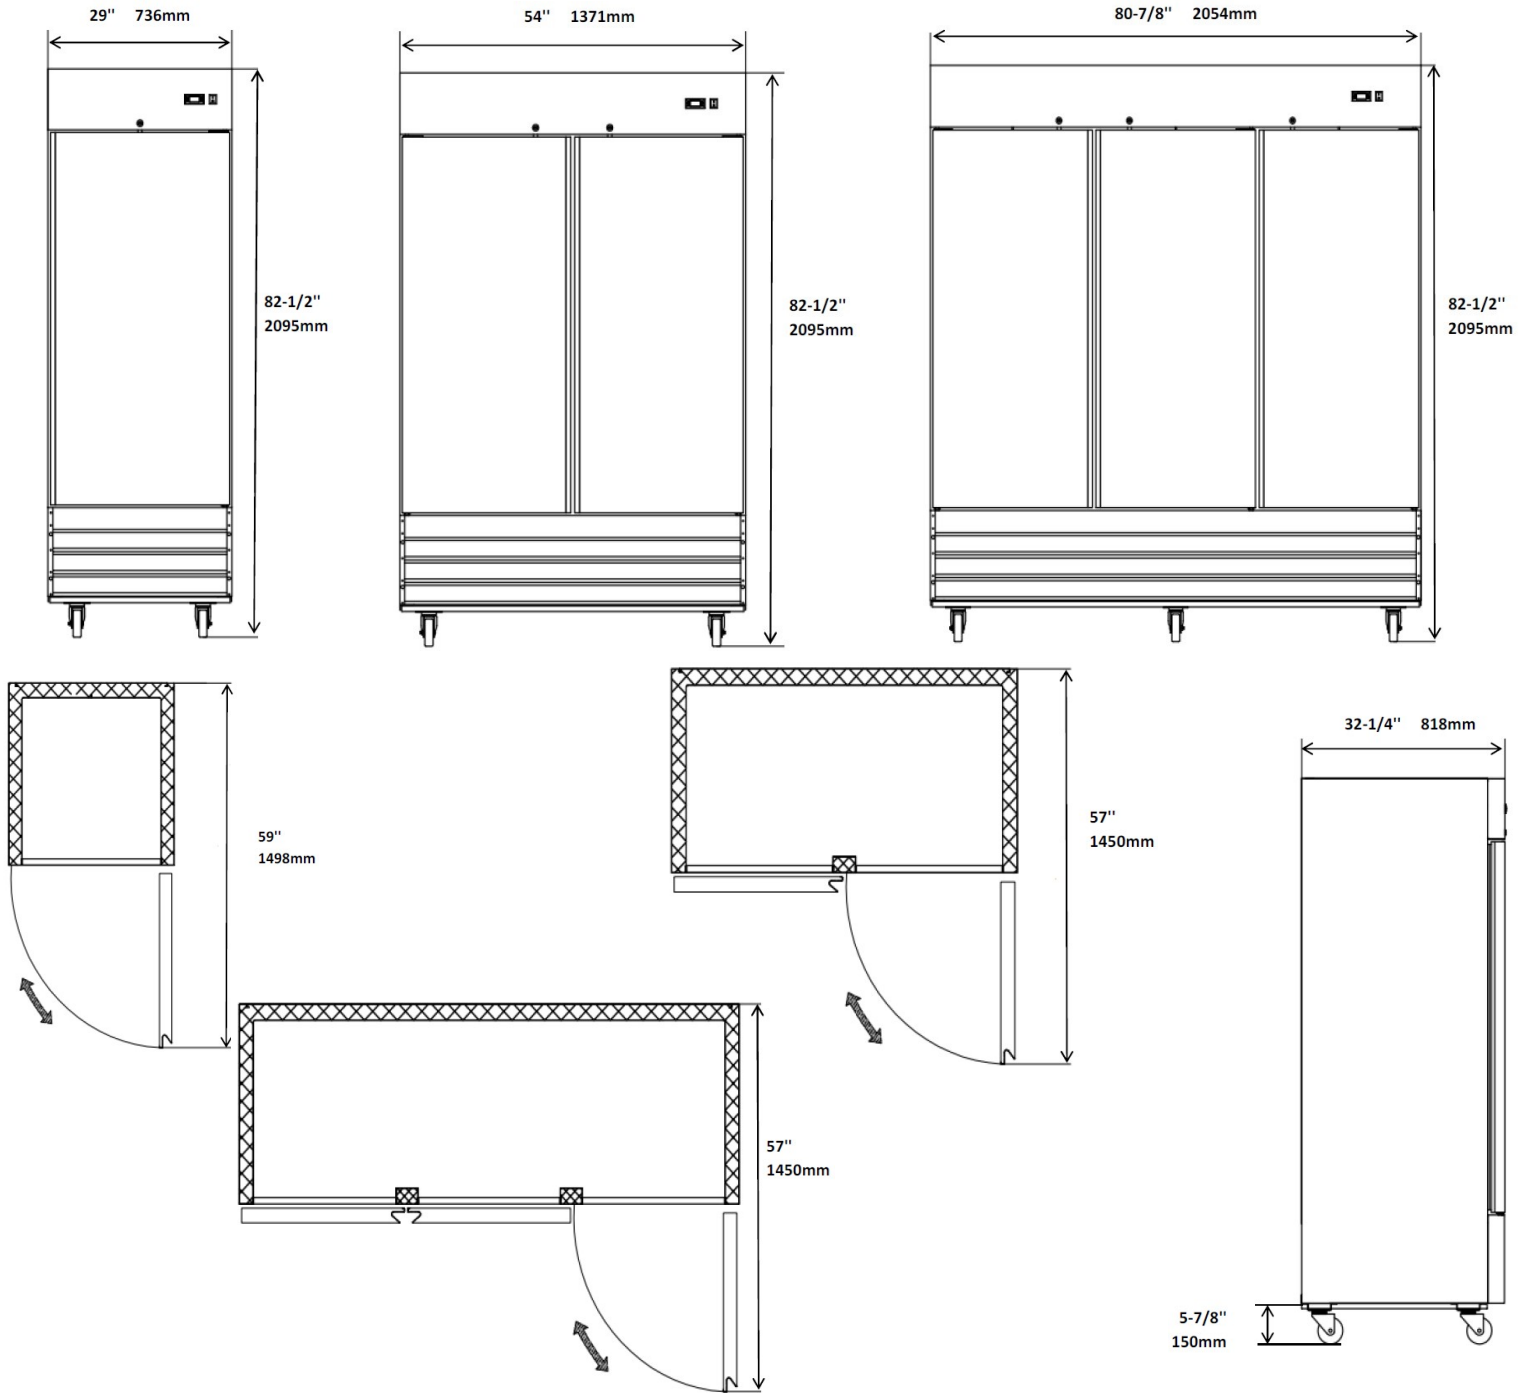

Model	Doors	Shelves	Cabinet Dim (inches)			HP	Voltage	Amps	NEMA Plug	Cord Length	Crated Weight
			L	D	H						
ERB1X	1	3	29	32.25	82.5	1/5	115/60/1	2.6	5-15P	7.4'	337
ERB2X	2	6	54	32.25	82.5	1/4+	115/60/1	3.8	5-15P	7.2'	513
ERB3X	3	9	80.8	32.25	82.5	3/4	115/60/1	9.0	5-15P	7.2'	704
EFB1X	1	3	29	32.25	82.5	1/2+	115/60/1	7.1	5-15P	7.4'	347
EFB2X	2	6	54	32.25	82.5	1	115/60/1	10.7	5-15P	7.2'	559
EFB3X	3	9	80.875	32.25	82.5	1	115/60/1	13.3	5-20P	7.2'	746