




# Refrigeration "X"



## REFRIGERATORS AND FREEZERS BOTTOM MOUNT

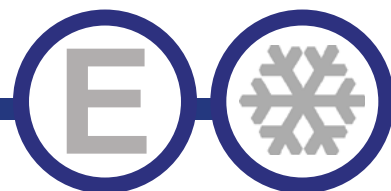

| Model | Doors |
|-------|-------|
| ERB1X | 1     |
| ERB2X | 2     |
| ERB3X | 3     |
| EFB1X | 1     |
| EFB2X | 2     |
| EFB3X | 3     |

### STANDARD FEATURES

- Stainless steel exterior & interior floor, interior and back aluminum. Option of bright white aluminum interior available.
- Stainless Interior available - add suffix "-SI" to the model number. i.e. ERB1X-SI
- Refrigeration system keeps food at safe temperatures between 33°F and 41°F (0.5°C to 5°C), and freezers -10°F and 0°F (-23°C --18°C).
- Self-Closing doors with 90 degree stay-open feature. Locks and keys included.
- Shelves: Adjustable heavy-duty PVC coated shelves.
- Electronic control system makes it easy to adjust temperature set point and defrost frequency.
- Preinstalled 4" swivel casters with brakes.
- Removable rear cover makes it easy to access condenser coil for cleaning and service.
- Uses R290 refrigerant, which is eco-friendly and more efficient.
- Incandescent interior lighting, safety shielded.
- Warranty: Two year parts & labor warranty, and additional 3 years on compressor.


**\*Not suitable for installation in a non-commercial or residential applications.**

| Items              | Description                                      | Items                | Description                                            |
|--------------------|--------------------------------------------------|----------------------|--------------------------------------------------------|
| Front, top & sides | <a href="#">Stainless steel</a>                  | Temperature control  | <a href="#">Solid state thermostat/Digital display</a> |
| Doors              | <a href="#">Stainless steel / Aluminum liner</a> | Approvals            | <a href="#">ETL Listed</a>                             |
| External back      | <a href="#">Aluminum</a>                         | Refrigerating system | <a href="#">Capillary tube</a>                         |
| Cabinet interior   | <a href="#">Aluminum</a>                         | Refrigerant          | <a href="#">R290</a>                                   |
| Interior floor     | <a href="#">Stainless Steel</a>                  | Temperature range    | <a href="#">(R) 33-41F; (F) -10° to 0°F</a>            |
| Insulation         | <a href="#">Polyurethane (CFC free)</a>          | Evaporator           | <a href="#">Powder coated aluminum/copper</a>          |
| Shelves            | <a href="#">Heavy duty, PVC coating</a>          | Condensing unit      | <a href="#">Bottom mounted</a>                         |

**CONFORMS TO NSF/ANSI STD 7**



## DETAILS AND DIMENSIONS

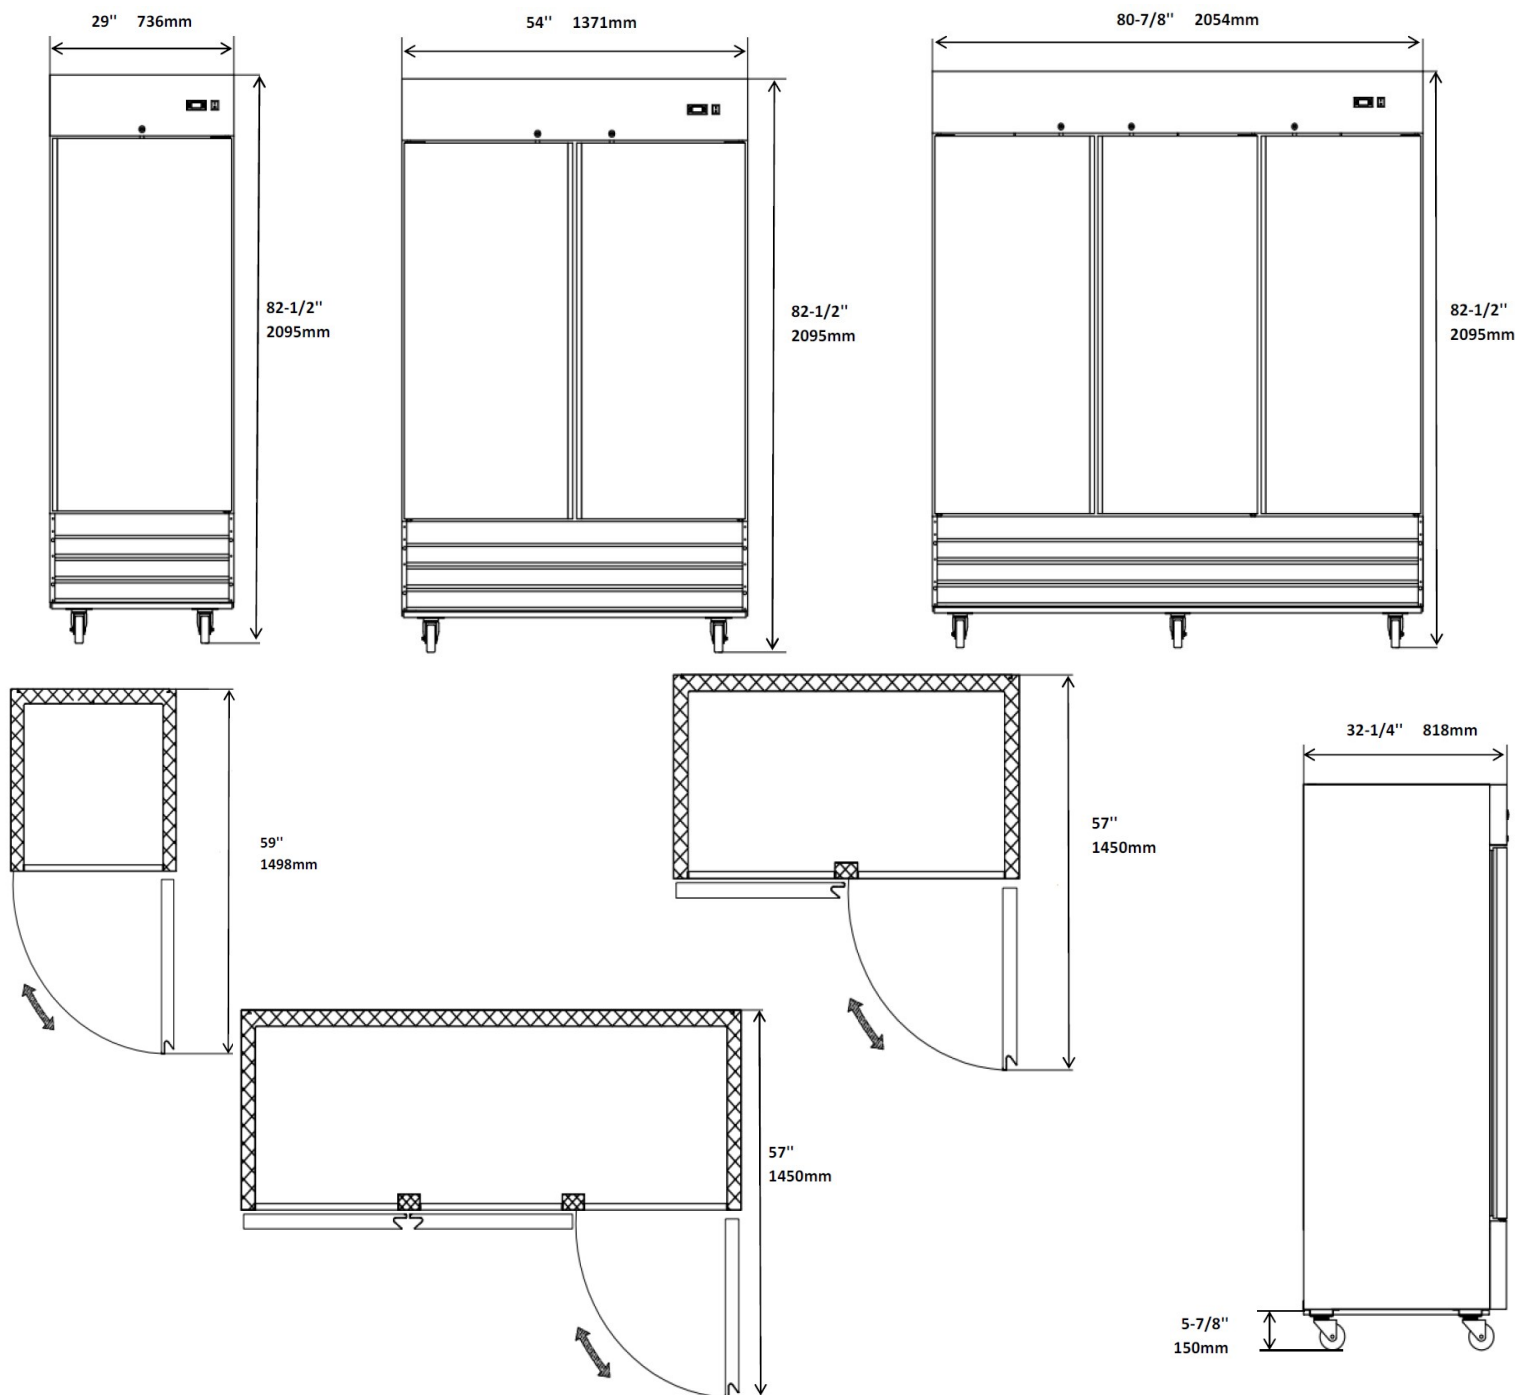

| Model | Doors | Shelves | Cabinet Dim (inches) |       |      | HP   | Voltage  | Amps | NEMA Plug | Cord Length | Crated Weight |
|-------|-------|---------|----------------------|-------|------|------|----------|------|-----------|-------------|---------------|
|       |       |         | L                    | D     | H    |      |          |      |           |             |               |
| ERB1X | 1     | 3       | 29                   | 32.25 | 82.5 | 1/5  | 115/60/1 | 2.6  | 5-15P     | 7.4'        | 337           |
| ERB2X | 2     | 6       | 54                   | 32.25 | 82.5 | 1/4+ | 115/60/1 | 3.8  | 5-15P     | 7.2'        | 513           |
| ERB3X | 3     | 9       | 80.8                 | 32.25 | 82.5 | 3/4  | 115/60/1 | 9.0  | 5-15P     | 7.2'        | 704           |
| EFB1X | 1     | 3       | 29                   | 32.25 | 82.5 | 1/2+ | 115/60/1 | 7.1  | 5-15P     | 7.4'        | 347           |
| EFB2X | 2     | 6       | 54                   | 32.25 | 82.5 | 1    | 115/60/1 | 10.7 | 5-15P     | 7.2'        | 559           |
| EFB3X | 3     | 9       | 80.875               | 32.25 | 82.5 | 1    | 115/60/1 | 13.3 | 5-20P     | 7.2'        | 746           |