



Gas Regulator Included

COMMERCIAL GAS RANGE



Model	Gas	Ovens	Burners
R4-N	Natural	1	4
R4-P	Propane	1	4
R6-N	Natural	1	6
R6-P	Propane	1	6
R10-N	Natural	2	10
R10-P	Propane	2	10

All ranges are shipped as Natural Gas and have a conversion kit included with the range to convert it to propane

STANDARD FEATURES

- 30,000 BTU cast iron burner with individual pilot lights
 - Heavy duty 12" x12" removable cast iron grates
 - Instant light flame adjustable control knobs
- Full Size Oven
 - 30,000 BTU oven burner
 - Cool to touch oven door handle
 - Two adjustable oven racks easily removable
 - Compression spring door system
 - Flame failure safety device
 - Adjustable thermostat: 250°F – 550°F
 - R6 & R10 hold full size sheet pans
- Construction
 - Heavy duty steel frame
 - Stainless Steel front – 24.75" high backriser and shelf
 - Removable crumb tray under the top burners
 - 6" adjustable Stainless steel legs or casters
 - ¾" NPT gas connection

The Entrée Sauté Commercial Gas Range has powerful Planck 30,000 BTU cast iron burners. Each burner has an individual pilot light - heavy duty 12" x 12" removable cast iron grate and individual instant light control knob. It is constructed with a stainless steel front, 24.75" high backriser and shelf, 6" adjustable stainless steel legs or casters and a ¾" NPT gas connection.

The standard oven is powered with a 30,000 BTU Burner and comes with two easy to remove oven racks. It includes a porcelain oven liner for easy cleaning and a compression spring door hinge system for durability. The oven thermostat adjusts from 250°F - 550°F and is equipped with a flame failure safety device.

Warranty: Entrée's exclusive parts and labor FUSS warranty takes affect from 1 year after end user purchase.


COMMERCIAL COOKING





DETAILS AND DIMENSIONS

- A convertible 3/4" NPT appliance pressure regulator is provided with this unit and set for:
Natural Gas 4.0" W.C.
Propane Gas 10.0" W.C.
- Rear Gas Connections is 3/4" NPT
- Recommended incoming pressure:
Natural Gas 4.5" W.C. with not more than a 1/2" W.C. pressure drop
LP Gas 10.5" W.C. with not more than a 1/2" W.C. pressure drop
- If using a commercial flex it must comply with ANSI Z 21.69

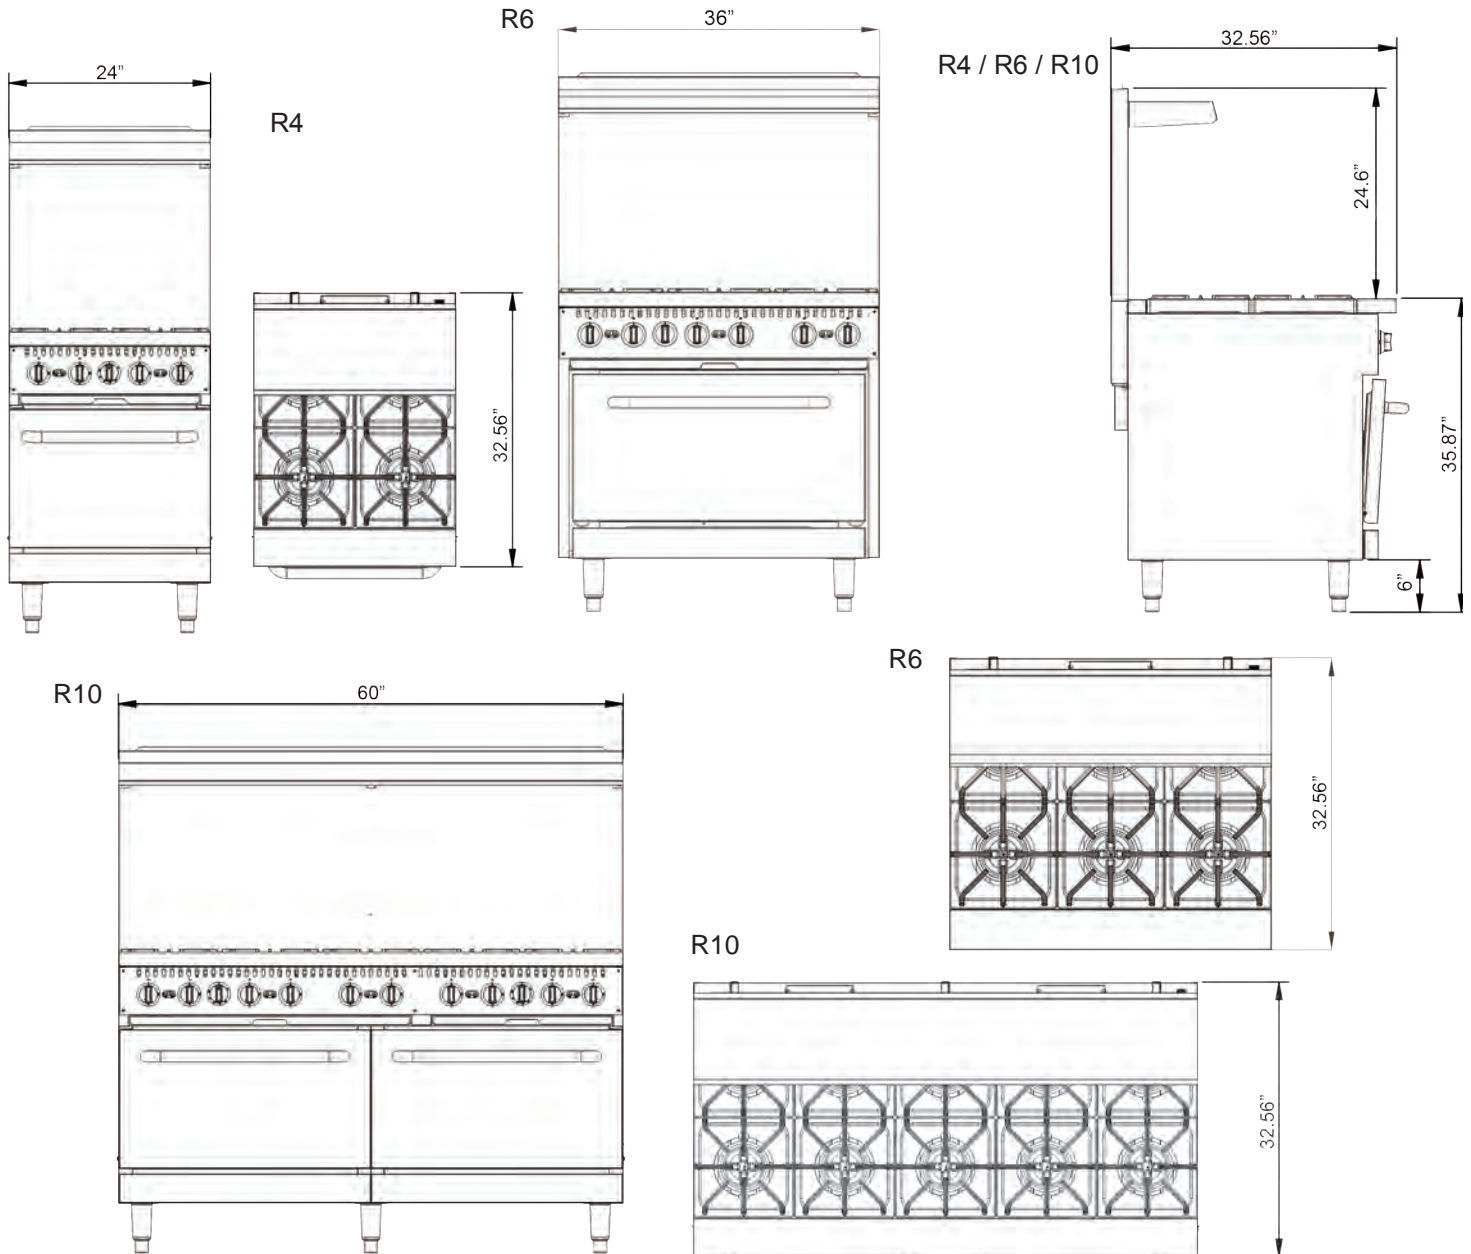

Model	Burners	External Dimensions			Internal Oven Dimensions			BTU's (per burner)	BTU's (per oven)	Total BTU's	Crated Weight (lbs)
		W	D	H	W	D	H				
R4	4	24	32.56	35.9+24.6	20.6	25.8	13.7	30,000	30,000	150,000	356
R6	6	36	32.56	35.9+24.6	26.8	25.8	13.7	30,000	30,000	210,000	455
R10	10	60	32.56	35.9+24.6	26.8	25.8	13.7	30,000	30,000 x 2	360,000	737