



USA FOODSERVICE DIVISION

TBB24-72-3G-Z1-BST-S-1

Glass Swing Door Back Bar 24" Depth Single Zone Cooler with Black Sub Top and Stainless Exterior

Project Name	Location	Item #	Quantity	Model #	AIA #	SIS #
--------------	----------	--------	----------	---------	-------	-------

FEATURES

Photo Not Yet Available

- R290 Hydrocarbon refrigerant.
- Maintains temperature of 35°F (1.7°C).
- Exterior: Stainless exterior with black sub top.
- Interior: Stainless steel floor with heavy gauge galvanized steel walls.
- Each Doors fitted with stainless flat top door handles.
- True's self-cleaning RCU technology eliminates the need to clean the condenser coil, reduces energy consumption and helps maintain the coldest temperatures and freshest product.
- LED interior lighting.
- NSF/ANSI Standard 7 compliant for the storage and/or display of packaged or bottled product.
- Recommended 1" clearance side and back
- UL Rated for outdoor use.

ROUGH-IN DATA

Specifications subject to change without notice. Chart dimensions rounded up to the nearest 1/8" (millimeters rounded up to next whole number).

Model	Doors	Shelves	Capacity			Cabinet Dimensions (inches) (mm)			115V/60/1 Voltage			Cord Length‡ (total ft.) (total m)	Crated Weight (lbs.) (kg)
			12 oz. Cans	12 oz. Bottles	1/2 Barrels	W	D	H*	HP	Amps	NEMA		
			125 6-pks	78 6-pks	3	72 $\frac{1}{8}$	24 $\frac{7}{8}$	34 $\frac{1}{4}$	1/4	3.2	5-15P	10	415
TBB24-72-3G-Z1-BST-S-1	3	6				1829	632	868				3.04	188

† Depth does not include 1 $\frac{1}{2}$ " (12 mm) for door handles. *Height does not include 1/4" (7 mm) for leg levelers.

‡ Cord length listed represents usable cord length.



APPROVALS

AVAILABLE AT

115/60/1
NEMA-5-15P

Unit completely pre-wired at factory and ready for final connection to a 115/60/1 phase, 15 amp dedicated outlet. Cord and plug set included.



USA FOODSERVICE DIVISION

TBB24-72-3G-Z1-BST-B-1

Glass Swing Door Back Bar 24" Depth Single Zone Cooler with Black Sub Top and Stainless Exterior

ADDITIONAL FEATURES

Refrigeration System

- Factory engineered, self-contained, capillary tube system.
- Environmentally friendly R290 hydrocarbon refrigerant.
- Forced air refrigeration system which maintains 35°F (1.7°C) product temperature.
- True's self-cleaning RCU technology eliminates the need to clean the condenser coil, reduces energy consumption and helps maintain the coldest temperatures and freshest product.

Cabinet Construction

- Exterior: Stainless exterior with black sub top.
- Interior: Stainless steel floor with heavy gauge galvanized steel walls.
- Insulation: Entire cabinet is foamed-in-place using a high density, polyurethane insulation that has zero ozone depletion and zero global warming potential.
- Base fitted with leg levelers.

Doors

- Low-E, double pane thermal insulated glass doors with black powder coated door frames.
- Each door fitted with stainless flat top door handles.
- Door locks standard.

Shelving

- Six (6) adjustable, gray PVC coated wire shelves. Left/Right doors $17\frac{1}{16}$ " W x 18" D (449 mm x 458 mm). Center door 20" W x 18" (508 mm x 458 mm). Four (4) chrome plated shelf clips included per shelf.
- Aluminum shelf support pilasters. Shelves are adjustable on $\frac{1}{2}$ " (13 mm) increments.

Model Features

- NSF/ANSI Standard 7 compliant for the storage and/or display of packaged or bottled product.
- Electronic control.
- UL approved for outdoor use.

Electrical

- Unit completely pre-wired at factory and ready for final connection to a 115/60/1 phase, 15 amp dedicated outlet. Cord and plug set included.


Optional Features/Accessories

(upcharge and lead times may apply)


- Castors $\frac{7}{8}$ " (23mm), 2"D (51mm), 3"D (77mm), 4"D (102mm), 5"D (127mm) castors
- 6"H (153mm) legs
- 6"H (153mm) seismic legs
- Additional shelves
- One liter or wine bottle organizers
- Bottle Organizers (available in black or gray)

PLAN VIEWS


Plan View Notes: Dimensions in brackets are in millimeters. • Height does not include $\frac{1}{4}$ " (7 mm) for leg levelers. • Depth does not include $1\frac{1}{2}$ " (12 mm) for door handles.

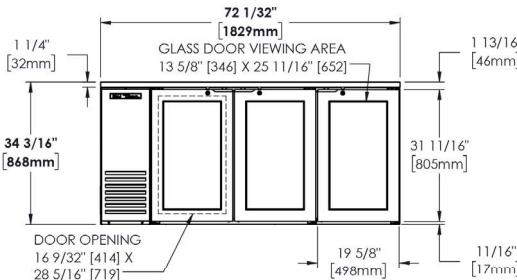


FRONT VIEW



SIDE VIEW

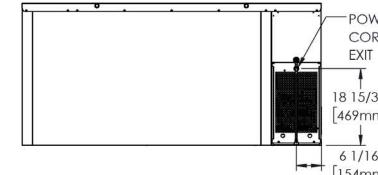

BACK VIEW

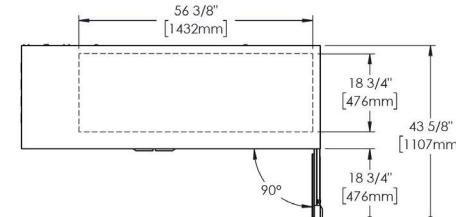

TOP VIEW



USA FOODSERVICE DIVISION

TBB24-72-3G-Z1-BST-S-1

Glass Swing Door Back Bar 24" Depth Single Zone Cooler with Black Sub Top and Stainless Exterior

Project Name	Location	Item #	Quantity	Model #	AIA #	SIS #
--------------	----------	--------	----------	---------	-------	-------

FEATURES

- R290 Hydrocarbon refrigerant.
- Maintains temperature of 35°F (1.7°C).
- Exterior: Stainless exterior with black sub top.
- Interior: Stainless steel floor with heavy gauge galvanized steel walls.
- Each Doors fitted with stainless flat top door handles.
- True's self-cleaning RCU technology eliminates the need to clean the condenser coil, reduces energy consumption and helps maintain the coldest temperatures and freshest product.
- LED interior lighting.
- NSF/ANSI Standard 7 compliant for the storage and/or display of packaged or bottled product.
- Recommended 1" clearance side and back
- UL Rated for outdoor use.

Photo Not Yet Available

ROUGH-IN DATA

Specifications subject to change without notice. Chart dimensions rounded up to the nearest 1/8" (millimeters rounded up to next whole number).

Model	Doors	Shelves	Capacity			Cabinet Dimensions (inches) (mm)			115V/60/1 Voltage			Cord Length‡ (total ft.) (total m)	Crated Weight (lbs.) (kg)
			12 oz. Cans	12 oz. Bottles	1/2 Barrels	W	D	H*	HP	Amps	NEMA		
			125 6-pks	78 6-pks	3	72 $\frac{1}{8}$	24 $\frac{7}{8}$	34 $\frac{1}{4}$	1/4	3.2	5-15P	10	415
TBB24-72-3G-Z1-BST-S-1	3	6				1829	632	868				3.04	188

† Depth does not include 1 $\frac{1}{2}$ " (12 mm) for door handles. *Height does not include 1/4" (7 mm) for leg levelers.

‡ Cord length listed represents usable cord length.



APPROVALS

AVAILABLE AT

115/60/1
NEMA-5-15P

Unit completely pre-wired at factory and ready for final connection to a 115/60/1 phase, 15 amp dedicated outlet. Cord and plug set included.



USA FOODSERVICE DIVISION

TBB24-72-3G-Z1-BST-B-1

Glass Swing Door Back Bar 24" Depth Single Zone Cooler with Black Sub Top and Stainless Exterior

ADDITIONAL FEATURES

Refrigeration System

- Factory engineered, self-contained, capillary tube system.
- Environmentally friendly R290 hydrocarbon refrigerant.
- Forced air refrigeration system which maintains 35°F (1.7°C) product temperature.
- True's self-cleaning RCU technology eliminates the need to clean the condenser coil, reduces energy consumption and helps maintain the coldest temperatures and freshest product.

Cabinet Construction

- Exterior: Stainless exterior with black sub top.
- Interior: Stainless steel floor with heavy gauge galvanized steel walls.
- Insulation: Entire cabinet is foamed-in-place using a high density, polyurethane insulation that has zero ozone depletion and zero global warming potential.
- Base fitted with leg levelers.

Doors

- Low-E, double pane thermal insulated glass doors with black powder coated door frames.
- Each door fitted with stainless flat top door handles.
- Door locks standard.

Shelving

- Six (6) adjustable, gray PVC coated wire shelves. Left/Right doors $17\frac{1}{16}$ " W x 18" D (449 mm x 458 mm). Center door 20" W x 18" (508 mm x 458 mm). Four (4) chrome plated shelf clips included per shelf.
- Aluminum shelf support pilasters. Shelves are adjustable on $\frac{1}{2}$ " (13 mm) increments.

Model Features

- NSF/ANSI Standard 7 compliant for the storage and/or display of packaged or bottled product.
- Electronic control.
- UL approved for outdoor use.

Electrical

- Unit completely pre-wired at factory and ready for final connection to a 115/60/1 phase, 15 amp dedicated outlet. Cord and plug set included.


Optional Features/Accessories

(upcharge and lead times may apply)


- Castors $\frac{7}{8}$ " (23mm), 2"D (51mm), 3"D (77mm), 4"D (102mm), 5"D (127mm) castors
- 6"H (153mm) legs
- 6"H (153mm) seismic legs
- Additional shelves
- One liter or wine bottle organizers
- Bottle Organizers (available in black or gray)

PLAN VIEWS


Plan View Notes: Dimensions in brackets are in millimeters. • Height does not include $\frac{1}{4}$ " (7 mm) for leg levelers. • Depth does not include $1\frac{1}{2}$ " (12 mm) for door handles.

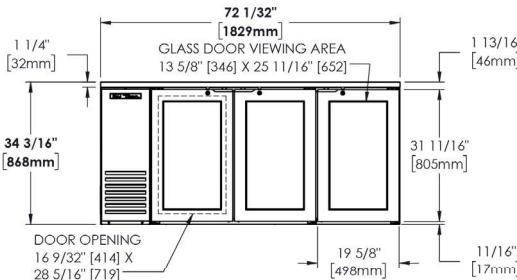


FRONT VIEW



SIDE VIEW

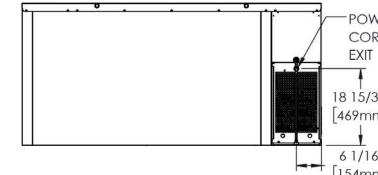

BACK VIEW

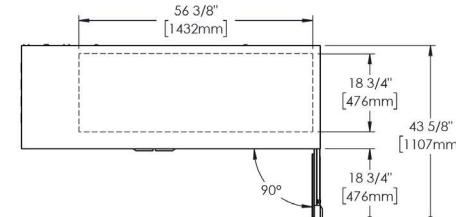

TOP VIEW