


Continental

Refrigerator

Project Name: _____
 Model Specified: _____
 Location: _____
 Item No. _____ Quantity: _____

Undercounter Refrigerated Back Bar Coolers

Models: BBUC50 BBUC59 BBUC69
 BBUC79 BBUC90

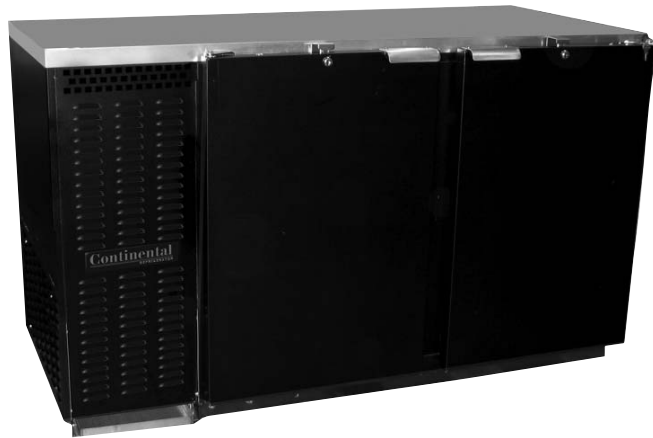

Model BBUC59

Standard Features

- Available in 50", 59", 69", 79", 90" Widths
- Modern, State-of-the-Art Styling
- Performance Rated Refrigeration System Utilizing Environmentally Safe R-134a Refrigerant
- Front Breathing
- Wear Resistant Black Vinyl Coated Steel Exterior with 304 Series Stainless Steel Countertop
- Heavy-Duty, Long Lasting, Galvanized Steel Interior with Reinforced Stainless Steel Floor
- Stainless Steel Reinforced Threshold Sills for Ease of Loading
- Cylinder Keyed Security Lock and Magnetic Snap-In Gasket on Each Door
- Full Length, Extra Large, Non-Corrosive, Plasticized Fin Evaporator Coil Provides Uniform Air Flow Distribution to Maintain Constant Product Temperature and Quick Uniform Recovery
- Heavy Duty, Adjustable and Epoxy-Coated Steel Shelves
- Easily Accessible and Serviceable Slide-Out Condensing Unit
- Readily Removable Front, Rear and Side Venting Louvered Grills Allow Greater Condenser Air Flow for Tight Fit Installations
- Incandescent Interior Lighting
- Automatic, Energy Saving, Non-Electric Condensate Disposal
- High Density, Non-CFC Polyurethane Foamed-In-Place Insulation

Options & Accessories

- | | |
|--|--|
| <input type="checkbox"/> 6" Adjustable Legs | <input type="checkbox"/> Pass Thru |
| <input type="checkbox"/> Remote -R | <input type="checkbox"/> SS Models - Stainless Steel Exterior, Galvanized Steel Interior |
| <input type="checkbox"/> Additional Shelves | <input type="checkbox"/> Electric Condensate |
| <input type="checkbox"/> Stainless Steel Shelves | <input type="checkbox"/> Heavy Duty Pilasters and Shelf Clips |
| <input type="checkbox"/> 4" Locking Casters | <input type="checkbox"/> Condensing Unit on the Right |
| <input type="checkbox"/> Stainless Steel Interior for NSF 7 - approved for open food | |
| <input type="checkbox"/> Shallow Depth | |



Approval: _____



A Division of National Refrigeration & A/C Products, Inc.
 539 Dunksferry Road Bensalem, PA 19020
 (800) 523-7138 Fax: (215) 244-9579
 www.continentalrefrigerator.com

Printed in U.S.A
 March, 2009


Project Name: _____ Model Specified: _____
 Location: _____ Item No. _____ Quantity: _____

SPECIFICATIONS


DIMENSIONAL DATA

	BBUC50	BBUC59	BBUC69	BBUC79	BBUC90
Net Capacity (cu. ft.)	16	22	26	28	35
Barrel Capacity (# of Barrel Type Kegs)	—	2	3	4	4
Straight Wall Capacity (# of Straight Wall Kegs)	2	3	3	4	5
Width, Overall (in.)	50	59	69	79	90
Depth, Overall, (in.) (incl. Hdl.& Bumpers)	28 ¹⁵ / ₁₆	28 ¹⁵ / ₁₆	28 ¹⁵ / ₁₆	28 ¹⁵ / ₁₆	28 ¹⁵ / ₁₆
Height, Overall (in.)	34 ¹⁵ / ₁₆	34 ¹⁵ / ₁₆	34 ¹⁵ / ₁₆	34 ¹⁵ / ₁₆	34 ¹⁵ / ₁₆
Number of Doors	2	2	2	3	3
Number of Shelves	4	4	4	6	6
Condensing Unit Size (H.P.)	1/3	1/3	1/3	1/3	1/2
Refrigerant	R-134a	R-134a	R-134a	R-134a	R-134a
Cabinet Electrical Specs	115/60/1	115/60/1	115/60/1	115/60/1	115/60/1
Total Amps	9.6	9.6	10.3	10.3	13
Power Supply Cord (10 ft.)	yes	yes	yes	yes	yes
Shipping Weight (lbs.)	355	385	415	455	505
Shipping Height (in.)	46	46	46	46	46
Shipping Length (in.)	58	65	78	88	109
Shipping Depth (in.)	42	42	42	42	42


****NOTE:** A minimum clearance of 3" on each side, front and rear of cabinet is required for optimum performance.
 Note: All specifications subject to change without notice.

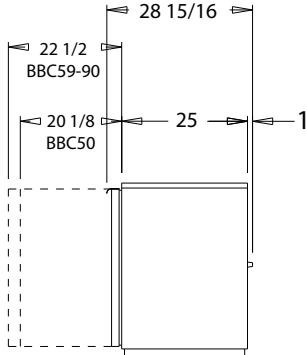


**BBUC50,59,69,79 & 90
 SIDE VIEW**

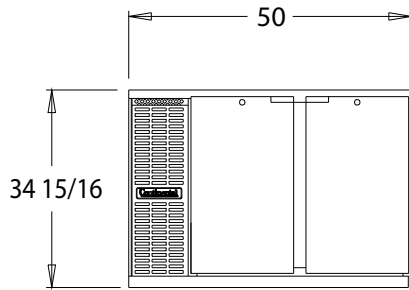


BBUC50 FRONT VIEW

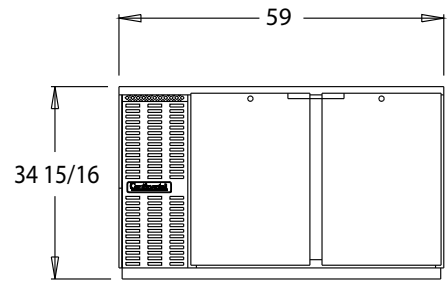


BBUC59 FRONT VIEW

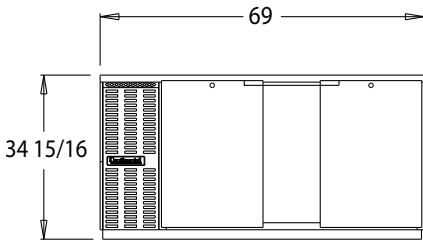

BBUC69 FRONT VIEW

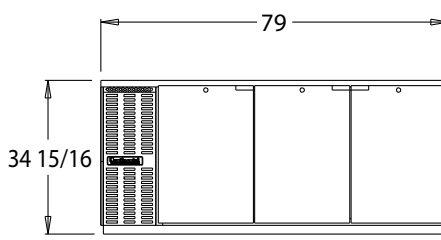

BBUC79 FRONT VIEW

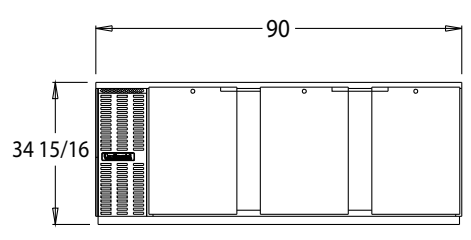

BBUC90 FRONT VIEW