

Griddles

Ultimate Energy Saving Counter Top Griddles






TAMG-36

FEATURES / BENEFITS

- AVAILABLE IN 12", 24", 36" AND 48" WIDE
- 16 GAUGE STAINLESS STEEL FRONT PLATE AND WRAP AROUND STAINLESS STEEL FINISH EXCEPT BACK PANEL
- COOKING PLATE SIDE WALL USES 14 GAUGE STAINLESS STEEL
- POLISHED GRIDDLE PLATE IN 3/4" THICKNESS
- ALUMINIZED U SHAPED BURNERS FOR EVERY 12" OF GRIDDLE SURFACE FOR EVEN COOKING
- HEAT SHIELD BETWEEN BURNERS CAPTURES HEAT ESCAPING TO THE BOTTOM
- BUILT-IN HEAT REFLECTOR KICKS BACK ESCAPING HEAT TO GRIDDLE SURFACE
- WELDED METAL SIDE SKIRT PREVENTS HEAT ESCAPING TO THE SHIELD
- RATED OVER 40% GAS ENERGY EFFICIENT BY TESTING LABORATORY
- HIGH EFFICIENT GRIDDLE WILL PROVIDE FASTER COOKING AND RECOVERY (13% MORE HEAT WITH 25% LESS GAS CONSUMPTION)
- STAINLESS STEEL PILOTS FOR INSTANT IGNITION
- BULL-NOSE STAINLESS STEEL FRONT EXTENSION PROVIDES ADDITIONAL SAFETY TO EMPLOYEES FROM BURNS
- COATED INSIDE & OUTSIDE GAS MANIFOLD PREVENTS RUST AND ENSURES LONGER LIFE OF UNIT
- ERGONOMICALLY DESIGNED HEAT RESISTANT ON-OFF KNOB IS MADE FROM PPS (POLY PHENYLENE SULFIDE)
- EASY TO INSTALL 2" & 4" STAINLESS STEEL EXTENSION LEGS ARE AVAILABLE AS OPTION

* Radiance has passed the industry's most rigorous and recent performance, safety and energy efficiency standards.

■ **WARRANTY : 1 Years Labor and Parts Warranty**

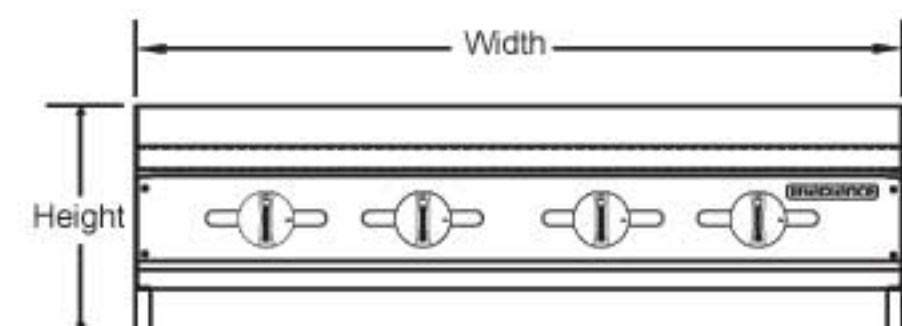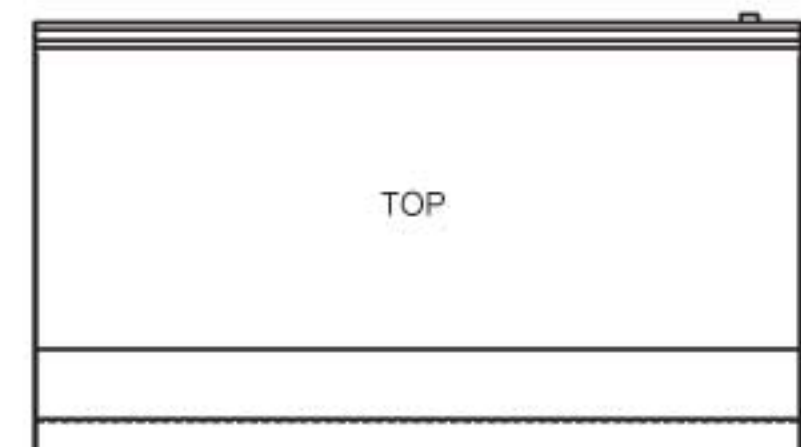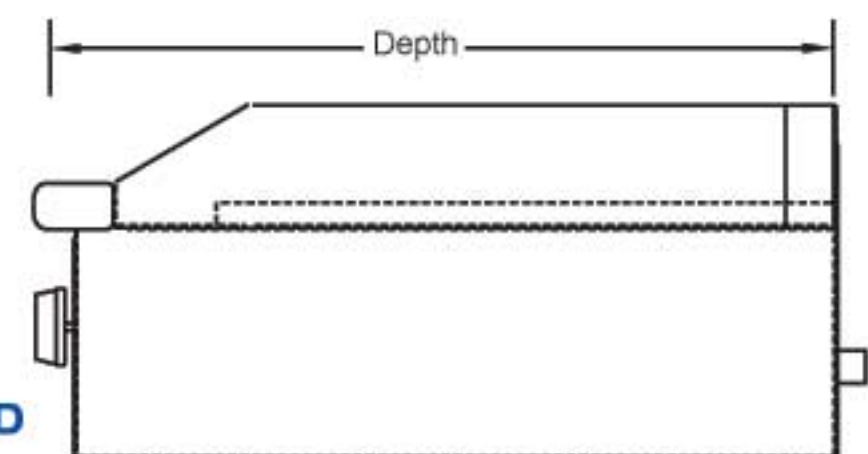

Model	Width	Depth	Height	#of Burners	#Total BTU	Weight
TAMG-12	12"	30"	10 1/2"	1	22,000	150
TAMG-24	24"	30"	10 1/2"	2	44,000	205
TAMG-36	36"	30"	10 1/2"	3	66,000	310
TAMG-48	48"	30"	10 1/2"	4	88,000	365

*Design and specifications subject to change without notice.