



COMMERCIAL ELECTRIC CONVECTION OVEN



Model	#Ovens	VAC
ECO-1-208	1	208
ECO-1-240	1	240

STANDARD FEATURES

Construction

- Stainless Steel Front and Angular Legs
- Double pane thermal glass windows on doors
- Steel legs with adjustable bullet feet
- Doors have an interlock switch that automatically turns the fan and elements off when open

Oven Features

- Easy to Clean Full Porcelain Oven Interior.
- Oven interior measures 28.25" x 21.5" x 20"
- 1/2 HP two speed fan motor
- Cooking chamber is lined with porcelain enamel
- 10 position guide rack with 1.5" spacing in between
- 5 heavy duty adjustable chrome plated racks
- Seamless interior and corners for easy cleaning

Controls

- Accurate solid state oven thermostat with a range from 150°F - 550°F
- 60 minute continuous ring timer - manual shut off
- Temperature ready indicator light
- **Options:** With Caster, add suffix "-C" to model number.
- Stacking Kits available:
SKE-L Legs, SKE-C Casters

Entrée's Full Size Electric Convection Oven is ideal for any high volume restaurant or food service establishment. Constructed of stainless steel, this oven operates with a forced air, two speed fan motor system with a cool down feature. The interior of the oven has a 10 position rack guide and fits full size sheet pans. Electronic controls featuring a 60 minute timer and manual temperature knob. The double pane glass doors have a interlock switch that automatically turns the fan and elements off when they are opened. Includes stainless steel legs and adjustable bullet feet. Casters are optional, front swivel locking, rear swivel.

Note: Double Deck ovens are shipped as single decks.

Warranty: Entrée's exclusive parts and labor FUSS warranty takes effect at time of purchase for 1 year.

***Not suitable for installation in a non-commercial or residential applications**


Customer Service (704) 900-2068 - Fax (888) 388-6017 -
Website: www.entree.biz, Email: greatfood@entree.biz






COMMERCIAL COOKING



DETAILS AND DIMENSIONS

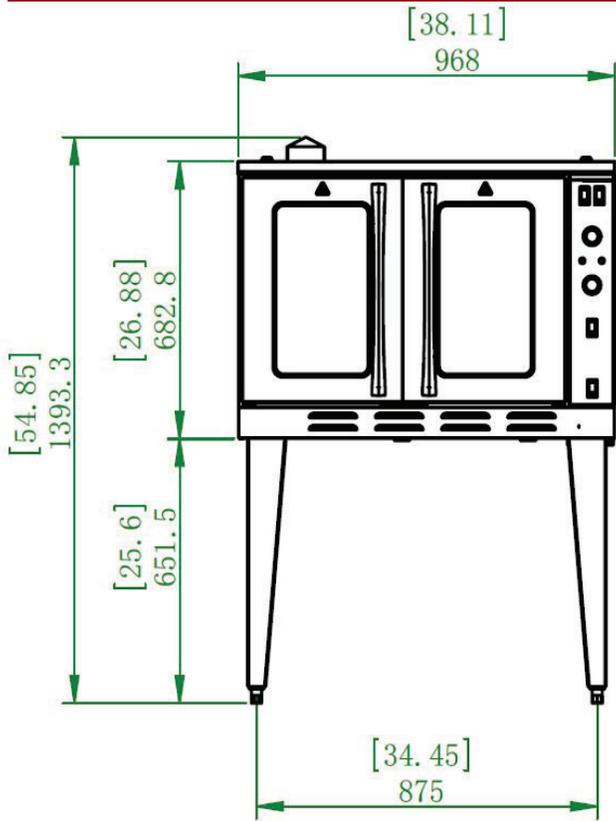

The power cord hole

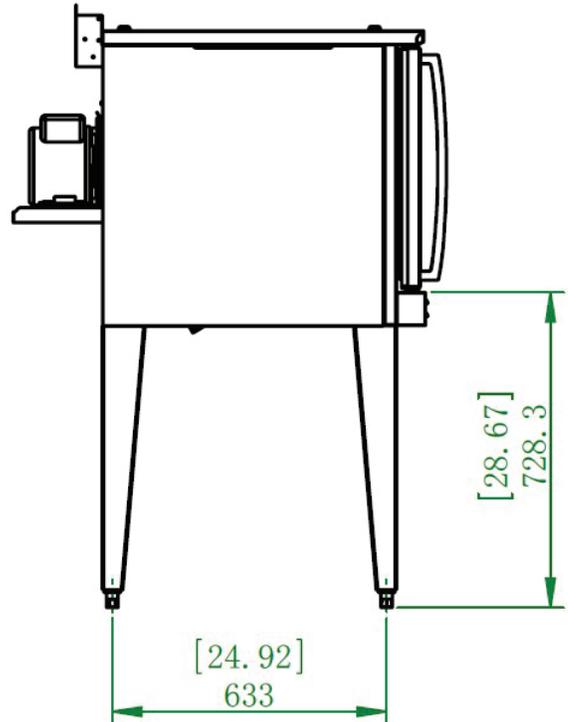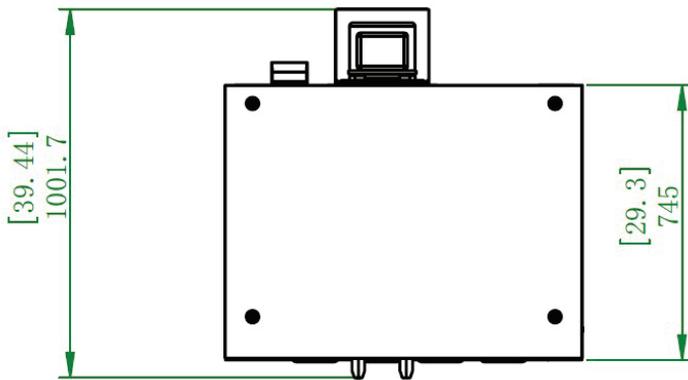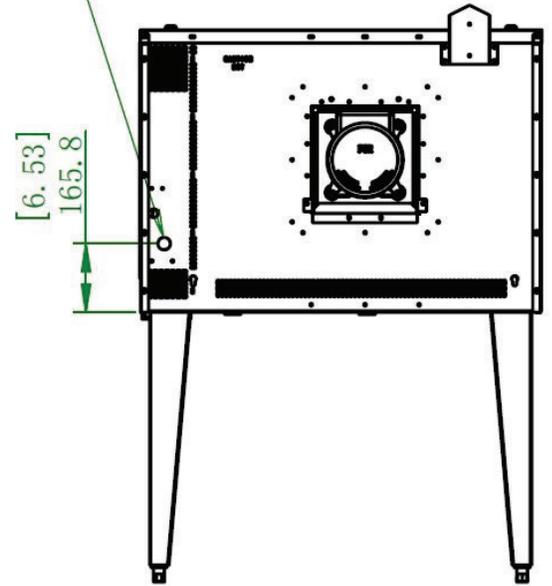

Model	Racks	External Dimensions (Inches)			Internal Oven Dimensions (Inches)			Total kW's	AMP Phase				Voltage	Crated Weight (lbs)
		W	D	H	W	D	H		Single ϕ	Three ϕ				
ECO-1-208	5	38.11	39.44	54.85	28.5	21.5	20	11	53	27	24	27	208VAC	579
ECO-1-240	5	38.11	39.44	54.85	28.5	21.5	20	10.1-11.9	50	30	27	30	220-240VAC	579